HIGH PURITY SANITARY BALL VALVES



THE TF-5308/5309 VALVE IS DESIGNED FOR HIGH PURITY APPLICATIONS IN THE PHARMACEUTICAL, BIOPHARM, PERSONAL CARE PRODUCTS AND FOOD INDUSTRIES AND OFFERS A UNIQUE ARRAY OF DESIGN FEATURES.

Features & Benefits

- » ½"-2" sizes feature an enclosed body bolt design
- » Live-loaded stem with self-adjusting packing and no internal tapers
- » Designed for high cycle automated applications
- » Highly polished internals and end caps 8-12 Ra
- » All materials comply with FDA, USDA, & 3A requirements
- » Manufacturer is ISO 9000 certified
- » ASTM 316 stainless steel investment cast body and end caps
- » Available with Tri-Clamp® or butt weld ends, butt weld ends have extended tangents for orbital welding
- » 100% tested and inspected prior to shipping with full traceability of all component parts
- » Weld end valves meet the ASME-BPE requirements for sulfur and carbon with extended tangents for orbital welding
- » 3-PC body design for serviceability in line
- » TFM1600 & PTFE components meet CFR Title 21 section 177.1550
- » All valves meet MSS SP-25, SP-82, SP-110 and ANSI B16 standards
- » Lubricant and silicone-free
- » Valve is passivated 316L material in regular or cavity filled





#1614

Locking lever handle design

Live leading stem packing with Belleville washers

Blowout proof stem design




Belleville washer and 3-piece packing design adjusts for wear and temperature fluctuations

ISO standard 5211 mounting pad for easy mounting of the actuator

Anti-static stem design grounds the ball to the valve body

Relief hole in ball is an option

TF-5308/5309

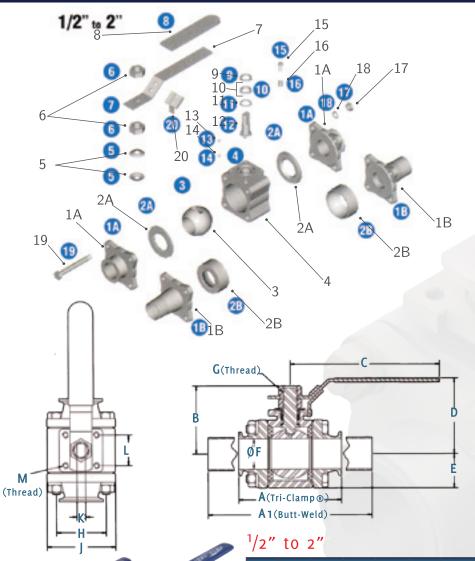



Item	Part (Qty)	Material				
1A	Tri-Clamp® End Cap (2)	T316L Stainless Steel				
1B	Butt Weld End Cap (2)	T316L Stainless Steel				
2A	Standard Seat (2)	TFM1600				
2B	Cavity Fill Seat (2)	TFM1600				
3	Ball	T316L Stainless Steel				
4	Valve Body	T316L Stainless Steel				
5	Belleville Washer (2)	T304 Stainless Steel				
6	Lever Nut	T304 Stainless Steel				
7	Handle	T304 Stainless Steel				
8	Handle Cover	Vinyl				
9	Gland Ring	Stainless Steel				
10	Stem Seal (3)	TFM1600				
11	Stem Gasket	TFM1600				
12	Stem	T316L Stainless Steel				
13	Springs (2)	T304 Stainless Steel				
14	Static Device (2)	T304 Stainless Steel				
15	Stop Screw	T304 Stainless Steel				
16	Stop Gland (7)	T303 Stainless Steel				
17	Hex Nut (4)	T304 Stainless Steel				
18	Spring Washer (4)	T304 Stainless Steel				
19	Bolt (4)	T304 Stainless Steel				
20	Handle Lock TFM1600	T304 Stainless Steel				

Size	Α	A1	В	C	D	E	F	G	Н	J	K	L	М
1/2"	3.50	6.06	1.75	4.33	2.05	0.75	0.37	5⁄16-24	1.18	1.62	0.20	1.00	M5
34"	3.50	6.06	1.87	4.33	2.27	1.00	0.63	³ %-24	1.43	2.00	0.24	1.00	M5
1"	3.50	6.55	2.50	5.32	2.93	1.06	0.87	½-20	1.68	2.50	0.81	1.18	M5
1½"	4.50	8.06	3.18	6.50	3.50	1.50	1.37	⁵ %-18	2.38	3.00	0.39	1.18	M6
2"	5.00	8.56	3.38	6.50	3.96	1.75	1.87	⁵ %-18	2.88	3.50	0.39	1.37	M6

Available Option

 $2^{1}/2^{\prime\prime}$ to $4^{\prime\prime}$





L(Thread)